


## C Status LEDs

### Front panel indicators




### Rear panel indicators



## D Technical Specification

- Typical applications Windows file transfer (SMB), OS and anti-virus update, E-mail transfer, FTP, shared printer, secure log
- Custom proxies External (not included)
- Diode separation Optical
- Protocol support All Ethernet-based unidirectional protocols, e.g. UDP/IP
- Throughput data speed 1 Gbps
- Data ports 2x Ethernet RJ45 1000Base-T
- Power supply 12 VDC
- Tamper resistance Tamper evidence seal
- Size 216 x 197,5 x 44 mm
- Temperature range 0 - +40° C (operation)  
-40 - +70° C (storage)
- Mounting Desktop or 19" rack (mounting kit included)  
Mounting kit for mounting two DD1000A side-by-side using only 1U available on request

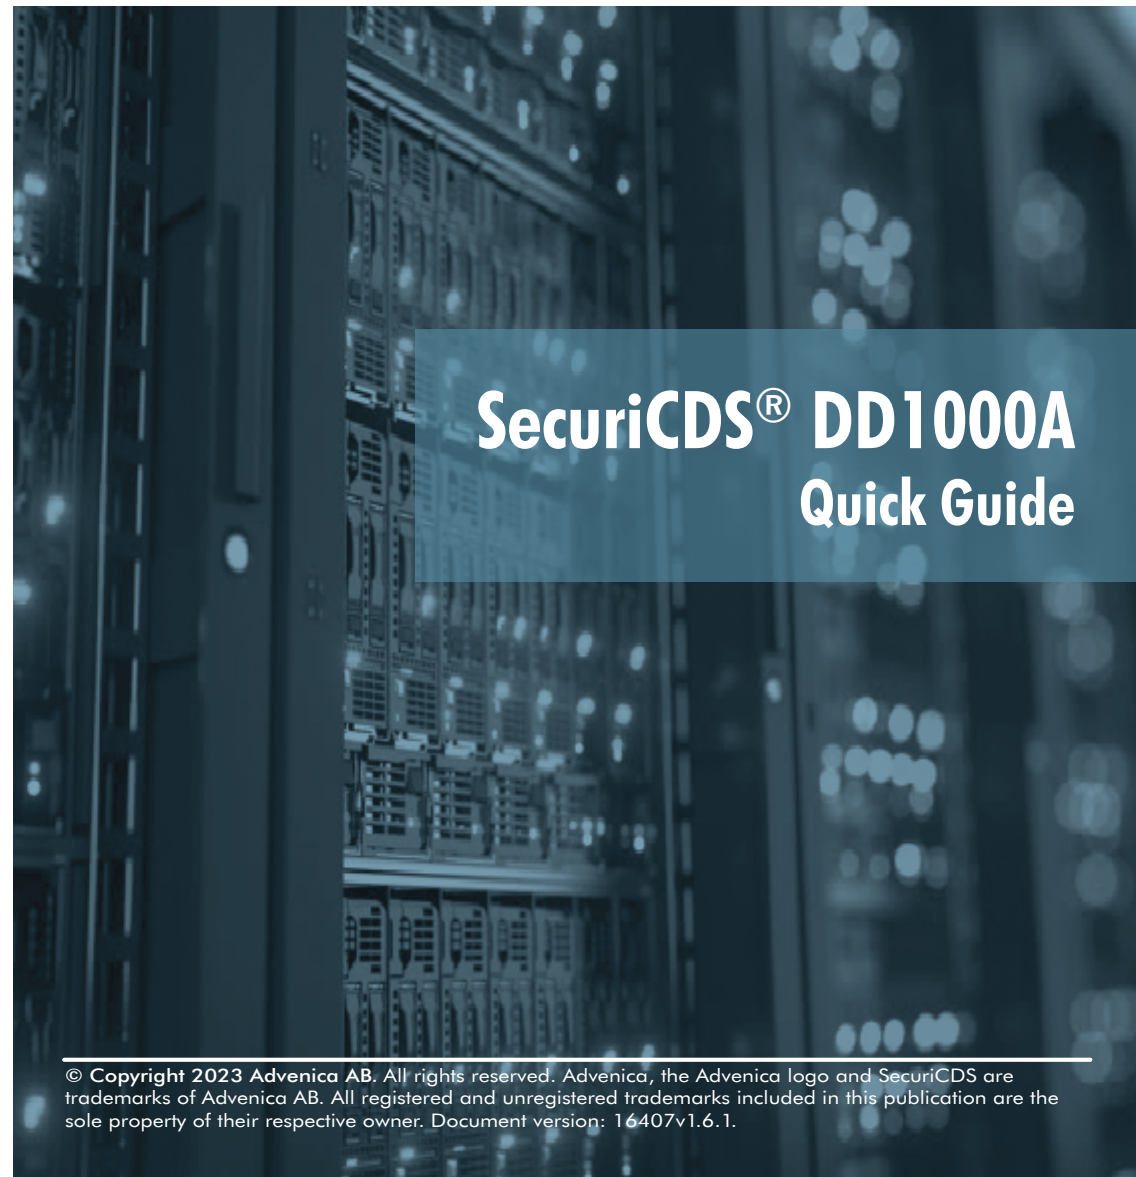


# SecuriCDS® DD1000A Quick Guide



# A

## SecuriCDS DD1000A Overview

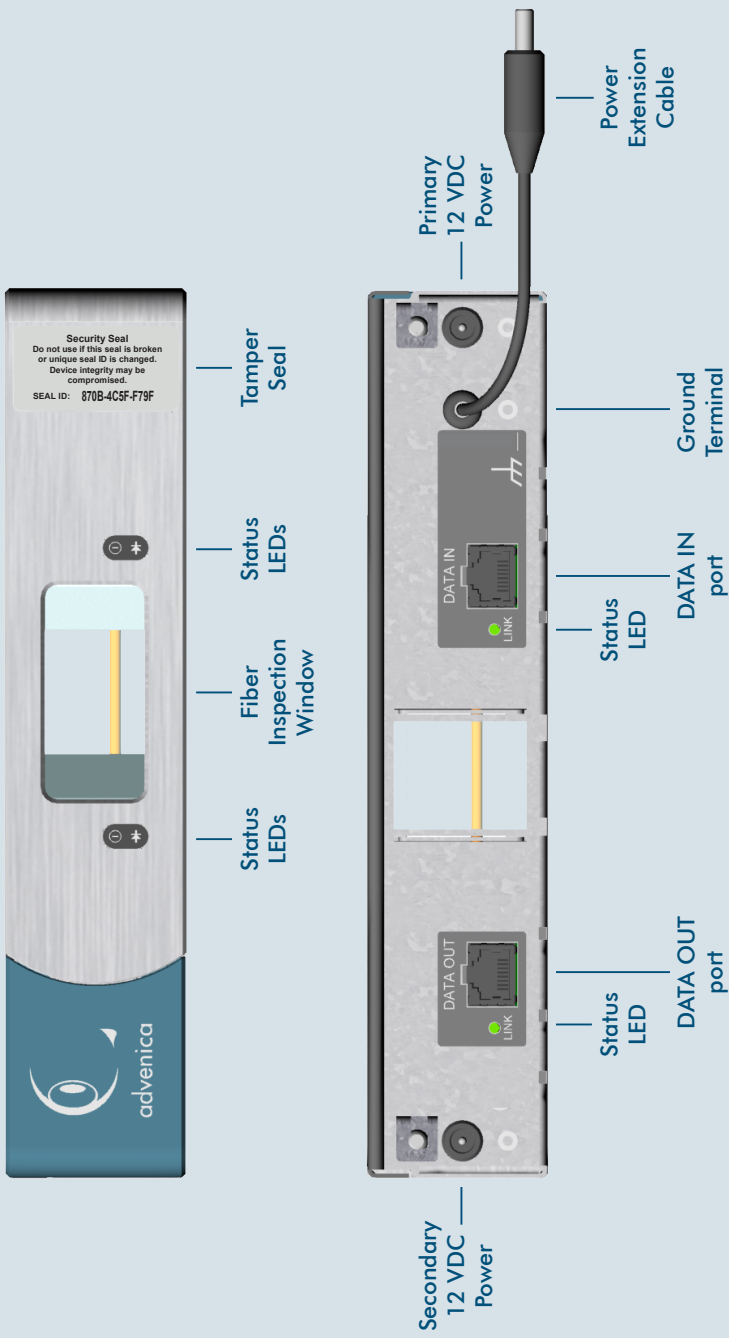

### Package Contents

- 1 SecuriCDS DD1000A
- 1 Power Supply
- 1 19" Mounting kit
- 1 Recommended Security Management manual
- 1 Quick Guide
- 1 Warranty flyer

# B

## Installation



It is extremely important to make sure the correct network (sending) is connected to the DATA IN port, or data may be sent in an unintended direction.

4 Connect to an AC power source

